


Axial-type metallized polypropylene film capacitor [CBB20 TMPP]

SINOCAPA[®]

TYPE CBB20

Axial-type metallized polypropylene film capacitor

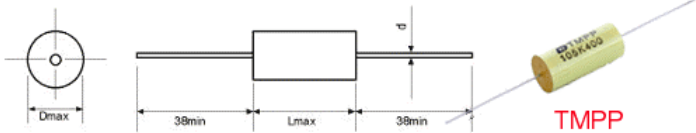

FEATURES:

Small size, light weight, excellent self-healing property
 Wrapped with polyester adhesive tape and ends filled with epoxy resin

SPECIFICATIONS			
Reference Standard	GB 10190 (IEC 60384-16)		
Climatic Category	40/085/21		
Rated Voltage	160/250V、400V、630V		
Capacitance Range	0.0010~3.3uF		
Capacitance Tolerance	±5% (J), ±10% (K), ±20% (M)		
Voltage Proof	1.6UR (5s)		
Dissipation Factor	≤10X0.0001, (1kHz, 20°C)		
Insulation Resistance	≥50 000MΩ, CR≤0.33uF		(20°C, 1min)
	≥15 000s, CR>0.33uF		
Dimensions of lead d±0.05(mm)	Dmax<7	7≤Dmax<16	Dmax≥16
	0.6	0.8	1.0

[How to order \(Pls see CL23B\)](#)

Axial-type metallized polypropylene film capacitor [CBB20 TMPP]

Dimensions (CBB13)						
capacitance (uf)	160/250V		400V		630V	
	Dmax	Lmax	Dmax	Lmax	Dmax	Lmax
0.0010					5.0	13.0
0.0015					5.0	13.0
0.0022					5.0	13.0
0.0033					5.0	13.0
0.0047					5.0	13.0
0.0068			5.0	13.0	6.0	16.5
0.010	5.0	13.0	6.0	16.5	6.5	16.5
0.015	5.0	13.0	6.0	16.5	7.5	16.5
0.022	6.0	16.5	6.5	16.5	8.5	16.5
0.033	6.0	16.5	7.0	16.5	8.5	20.5
0.047	6.5	16.5	8.0	16.5	9.5	20.5
0.068	7.5	16.5	8.0	20.5	9.0	28.0
0.10	8.5	16.5	9.0	20.5	10.0	28.0
0.15	8.5	20.5	8.5	28.0	12.0	28.0
0.22	9.5	20.5	10.0	28.0	13.0	33.0
0.33	9.0	28.0	11.5	28.0	15.5	33.0
0.47	10.5	28.0	13.0	28.0	18.0	33.0
0.68	12.0	28.0	14.5	33.0	21.0	33.0
1.0	13.0	33.0	17.0	33.0		
1.5	15.5	33.0	20.0	33.0		
2.2	18.0	33.0				
3.3	21.5	33.0				