


Box-type metallized polypropylene film interference suppression capacitor(X2 class) [CKT61]

SINOCAPA[®]

TYPE CKT61

Box-type metallized polypropylene film interference suppression capacitor(X2 class)

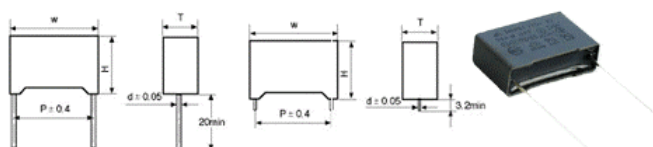

FEATURES:

- Compact size
- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Widely used in interference suppression circuit

Safety Approvals:

This product has been tested with the newest edition standards, such as IEC 60384-14 (2nd edition,1993), EN 13240, UL 1414, UL1283, CSA C22.2-1 etc. Approved with ten standards from nine countries.

SPECIFICATIONS				
Reference Standard	GB/T 14472 (IEC 60384-14)			
Climatic Category	40/100/56			
Rated Voltage	250/275VAC			
Capacitance Range	0.0047~2.2uF			
Capacitance Tolerance	±10% (K), ±20% (M)			
Voltage Proof	Between Terminals:2000VDC;2s(CR≤1.0uF) 1800VDC;2s(CR>1.0uF) Between Terminals To Case:2050VAC(2s)			
Dissipation Factor	≤0.1% (1kHz,20℃)			
Insulation Resistance	<table border="1"> <tr> <td>≥15 000MΩ, CR≤0.33uF</td> <td rowspan="2">(20℃, 1min,100V)</td> </tr> <tr> <td>≥5 000s, CR>0.33uF</td> </tr> </table>	≥15 000MΩ, CR≤0.33uF	(20℃, 1min,100V)	≥5 000s, CR>0.33uF
≥15 000MΩ, CR≤0.33uF	(20℃, 1min,100V)			
≥5 000s, CR>0.33uF				

[How to order \(Pls see CL23B\)](#)

Box-type metallized polypropylene film interference suppression capacitor(X2 class) [CKT61]

Dimensions (CKT61)							
Voltage (VAC)	Capacitance (uF)	Tolerance K(±10%);M(±20%)	W	H	T	P	d
250/275	0.0047	K、M	13.0	9.0	4.0	10.0	0.6
	0.0056	K、M	13.0	9.0	4.0	10.0	
	0.0068	K、M	13.0	9.0	4.0	10.0	
	0.0082	K、M	13.0	9.0	4.0	10.0	
	0.010	K、M	13.0	9.0	4.0	10.0	
	0.012	K、M	13.0	9.0	4.0	10.0	
	0.015	K、M	13.0	9.0	4.0	10.0	
	0.018	K、M	13.0	11.0	5.0	10.0	
	0.022	K、M	13.0	11.0	5.0	10.0	
	0.027	K、M	13.0	11.0	5.0	10.0	
	0.033	M	13.0	11.0	5.0	10.0	
	0.033	K	13.0	12.0	6.0	10.0	
	0.039	K、M	13.0	12.0	6.0	10.0	
	0.047	K、M	13.0	12.0	6.0	10.0	
	0.010	K、M	18.0	11.0	5.0	15.0	
	0.012	K、M	18.0	11.0	5.0	15.0	
	0.015	K、M	18.0	11.0	5.0	15.0	
	0.018	K、M	18.0	11.0	5.0	15.0	
	0.022	K、M	18.0	11.0	5.0	15.0	
	0.027	K、M	18.0	11.0	5.0	15.0	
	0.033	K、M	18.0	11.0	5.0	15.0	
	0.039	K、M	18.0	11.0	5.0	15.0	
	0.047	K、M	18.0	11.0	5.0	15.0	
	0.056	K、M	18.0	12.0	6.0	15.0	
	0.068	K、M	18.0	12.0	6.0	15.0	
	0.082	K、M	18.0	12.0	6.0	15.0	
	0.10	M	18.0	12.0	6.0	15.0	
	0.10	K	18.0	13.5	7.5	15.0	
	0.12	K、M	18.0	13.5	7.5	15.0	
	0.15	K、M	18.0	14.5	8.5	15.0	
	0.18	K、M	18.0	16.0	10.0	15.0	
	0.22	K、M	18.0	16.0	10.0	15.0	
	0.12	K、M	26.5	15.0	6.0	22.5	
	0.15	K、M	26.5	15.0	6.0	22.5	
	0.18	M	26.5	15.0	6.0	22.5	
	0.18	K	26.5	16.0	7.0	22.5	
	0.22	K、M	26.5	16.0	7.0	22.5	
	0.27	K、M	26.5	17.0	8.5	22.5	
	0.33	K、M	26.5	17.0	8.5	22.5	
	0.39	K、M	26.5	18.5	10.0	22.5	
	0.47	K、M	26.5	18.5	10.0	22.5	
	0.39	K、M	32.0	18.0	9.0	27.5	
0.47	K、M	32.0	18.0	9.0	27.5		
0.56	K、M	32.0	20.0	11.0	27.5		
0.68	K、M	32.0	20.0	11.0	27.5		
0.82	K、M	32.0	22.0	13.0	27.5		
1.0	K、M	32.0	22.0	13.0	27.5		
1.2	K、M	32.0	28.0	14.0	27.5		
1.5	K、M	32.0	28.0	14.0	27.5		
1.8	K、M	32.0	33.0	18.0	27.5		
2.2	K、M	32.0	33.0	18.0	27.5		